


5/8" - 2 1/2"
O.D.

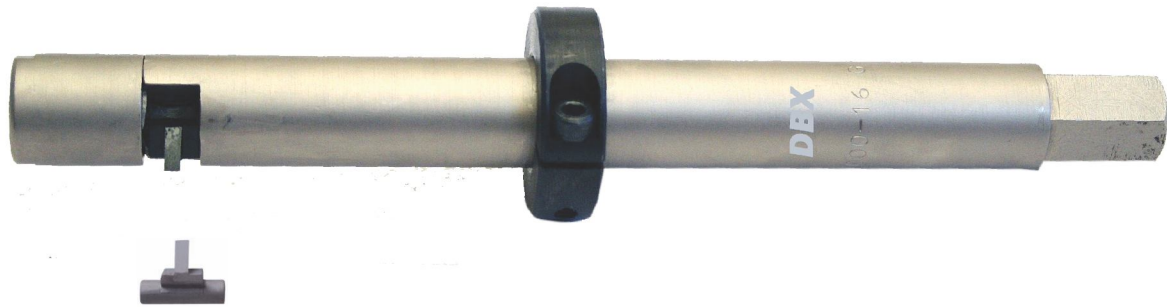

Features :

- DBX OTC type internal tube cutter pierces and cut off tubes with clean square edge in a single revolution of a tool. Recommended for non-ferrous tubes only & designed for hand operation using a ratchet handle.

mm	O. D.		Tube Gauge (BW)	Tube I.D.		Cutter Model No.	Spare Bit Model No.
	inch	inch		mm	inch		
15.87	5/8"		14	11.4 - 11.9	.450 - .470	OTC - 625 - 14	OTC - 625 - SB
			15 - 16	12.0 - 12.9	.472 - .510	OTC - 625 - 16	
			17 - 18	12.7 - 13.5	.500 - .531	OTC - 625 - 18	
			19 - 20	13.5 - 14.2	.531 - .560	OTC - 625 - 20	
			22	14.0 - 14.7	.550 - .580	OTC - 625 - 22	
19.05	3/4		14 - 15	14.7 - 15.5	.580 - .610	OTC - 750 - 14	OTC - 750 - SB
			16	15.2 - 16.0	.600 - .630	OTC - 750 - 16	
			17 - 18	15.9 - 16.5	.625 - .650	OTC - 750 - 18	
			19 - 20	16.7 - 17.5	.660 - .690	OTC - 750 - 20	
22.22	7/8		14 - 15	17.8 - 18.5	.700 - .730	OTC - 875 - 14	OTC - 875 - SB
			16 - 17	18.8 - 19.5	.740 - .770	OTC - 875 - 16	
			18	19.3 - 20.0	.760 - .790	OTC - 875 - 18	
			19 - 20	19.8 - 20.6	.780 - .810	OTC - 875 - 20	
25.40	1"		14	20.8 - 21.6	.820 - .850	OTC - 1000 - 14	OTC - 1000 - SB
			15	21.3 - 22.1	.840 - .870	OTC - 1000 - 16	
			16 - 17	22.8 - 22.6	.860 - .890	OTC - 1000 - 18	
			18 - 20	22.6 - 23.1	.890 - .910	OTC - 1000 - 20	
			22	23.9 - 24.6	.940 - .970	OTC - 1000 - 22	
31.75	1.1/4		12	25.9 - 26.7	1.020 - 1.050	OTC - 1250 - 12	OTC - 1250 - SB
			13 - 14	26.7 - 27.4	1.050 - 1.080	OTC - 1250 - 14	
			15 - 16	27.9 - 28.7	1.110 - 1.130	OTC - 1250 - 16	
			17 - 19	28.7 - 29.6	1.130 - 1.160	OTC - 1250 - 18	
38.10	1.1/2		12 - 13	32.5 - 33.3	1.280 - 1.310	OTC - 1500 - 12	OTC - 1500 - SB
			14 - 15	33.8 - 34.5	1.330 - 1.360	OTC - 1500 - 14	
			16 - 17	34.5 - 35.3	1.360 - 1.390	OTC - 1500 - 16	
			18 - 19	35.3 - 36.1	1.390 - 1.420	OTC - 1500 - 18	
50.80	2		12 - 13	45.0 - 46.0	1.770 - 1.810	OTC - 2000 - 12	OTC - 2000 - SB
			14 - 15	46.2 - 47.2	1.820 - 1.860	OTC - 2000 - 14	
			16 - 17	47.2 - 48.2	1.860 - 1.900	OTC - 2000 - 16	
			18 - 19	48.0 - 49.0	1.890 - 1.930	OTC - 2000 - 18	
63.50	2.1/2		12 - 13	57.6 - 58.6	2.270 - 2.310	OTC - 2500 - 12	OTC - 2500 - SB
			14 - 15	58.9 - 60.0	2.320 - 2.360	OTC - 2500 - 14	
			16 - 17	60.0 - 61.0	2.360 - 2.400	OTC - 2500 - 16	
			18 - 19	60.7 - 61.7	2.390 - 2.430	OTC - 2500 - 18	